


THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.VALCOURTINC.COM.

APPLIANCE DIMENSIONS	FRAMING DIMENSIONS		
<p><b>APPLIANCE DIMENSIONS</b></p> <p>Top view dimensions: 18 7/8" (481mm) chimney, 8 3/4" (221mm) gravity air kit, 14 3/8" (366mm) height, 10 1/2" (265mm) width, 6 1/4" (159mm) depth, 1 1/2" (39mm) base.</p> <p>Side view dimensions: 4 1/2" (114mm) top offset, 1 3/8" (35mm) top offset, 15 7/8" (404mm) width, 47 1/8" (1197mm) height, 37 1/4" (946mm) height, 37 1/2" (954mm) height, 17 3/8" (442mm) height, 3 3/4" (96mm) height, 4" (102mm) fresh air inlet (1), 25 7/8" (658mm) width, 18" (459mm) width, 29 5/8" (753mm) width, 3 3/4" (96mm) height.</p> <p>Bottom view dimensions: 37 7/8" (961mm) width, 8 3/4" (221mm) depth, 3 1/8" (80mm) height, 7 5/8" (192mm) width, 3" (76mm) fresh air inlet (2), 22 5/8" (574mm) height.</p> <p>Front view dimensions: 24 3/4" (630mm) width, 6" (152mm) forced air kit (3), 17 3/8" (441mm) height, 4" (103mm) height, 2" (52mm) height, 15 7/8" (404mm) width, 18" (457mm) width, electric inlet (2).</p>	<p><b>FRAMING DIMENSIONS</b></p> <p>3D perspective: MIN* 37 7/8" (962mm) depth, wood studs, combustibles, variable**.</p> <p>Side elevation: 1" (25mm) gap, 80" (2032mm) height, 47 1/8" (1197mm) height, 24 3/4" (629mm) width, variable**.</p>		
<p><b>CORNER INSTALLATION</b></p> <p>53 1/2" (1359 mm) roof pitch, 75 1/2" (1918 mm) base width.</p>			
<p><b>LEGEND</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 5px;">                 Combustible material allowed in this area  </td> <td style="width: 50%; padding: 5px;">                 Non-combustible material only in this area  </td> </tr> </table>		Combustible material allowed in this area 	Non-combustible material only in this area 
Combustible material allowed in this area 	Non-combustible material only in this area 		
<p>* Where applicable, add 6" for fresh air pipe and/or 10" for forced air pipe to the width of the chase. When drywall panels or any other finishing material inside the chase around the fireplace is to be used, add its thickness to the measurement.</p> <p>** For height equal or less than 4", see hearth extension section on reverse.</p>			

THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT [WWW.VALCOURTINC.COM](http://WWW.VALCOURTINC.COM).

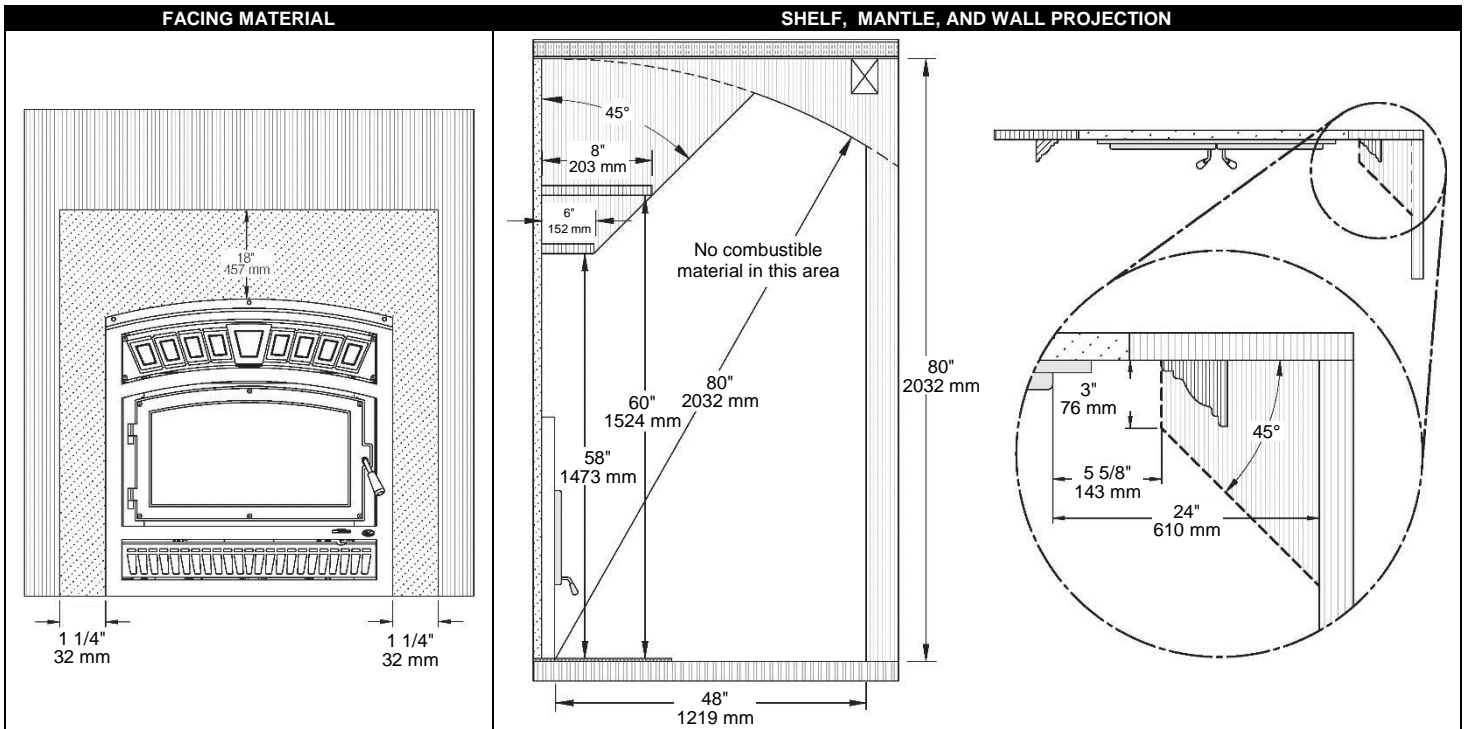

\*If fireplace is installed directly on the floor or on a raised base of less than 4", the hearth extension floor area must extend at least 18" (457 mm) in front of the fireplace with R-value equal to or greater than 1.00. Use 1/2" Micore or refer to manual for equivalent insulation.

LEGEND			
Combustible material allowed in this area		Non-combustible material only in this area	